

REV.
AFEDERAL SUPPLY CLASS
5935

AS85049/91

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: AS85049.


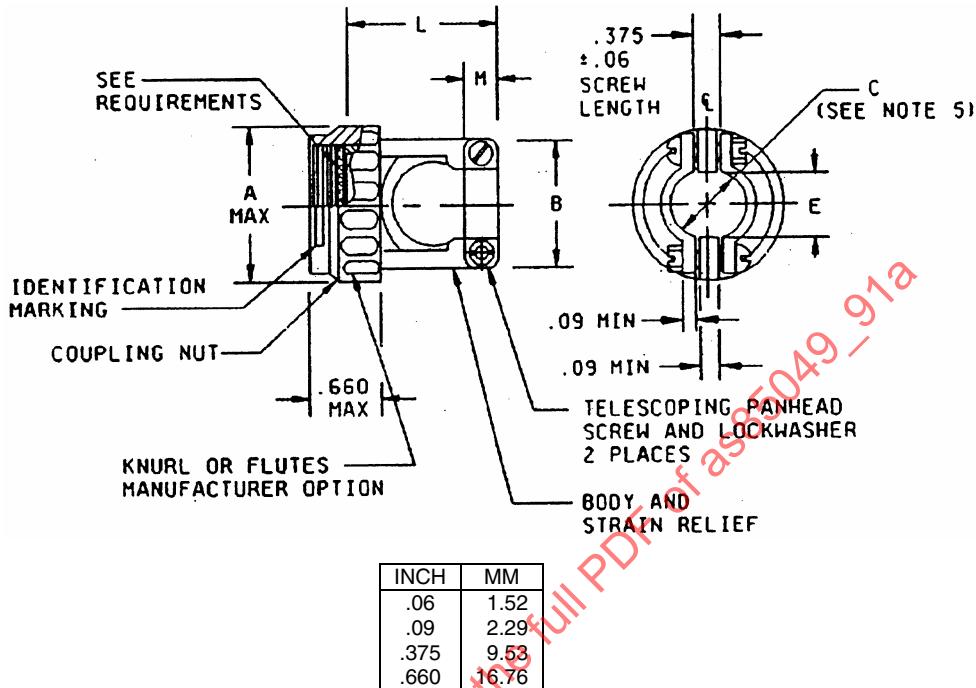


FIGURE 1 - CONFIGURATION AND DIMENSIONS

SAENORM.COM : Click to view the full PDF of AS85049-91a

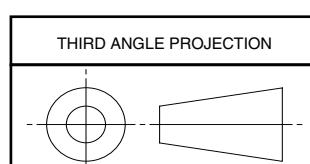

CUSTODIAN: SAE AE-8/AE-8C1

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, COMPOSITE, ELECTRICAL,
STRAIN RELIEF, STRAIGHT, SELF-LOCKING, CATEGORY 4C
(FOR MIL-DTL-38999 SERIES III AND IV CONNECTORS)

AS85049/91
SHEET 1 OF 3

**REV.
A**

Copyright © 2004 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2000-06 REVISED 2004-10

REV.
A

AS85049/91

SHELL SIZES AND DIMENSIONS

| SHELL SIZE | A MAX DIA | B MAX | C ±.031 DIA SEE NOTE 5 | E MIN | L MAX | M ±.03 | SCREW SIZE |
|------------|------------------|-----------------|---------------------------|-----------------|------------------|-----------------|------------|
| 9 | .858 (21.79) | .980 (24.89) | .219 (5.56) | .229 (5.82) | .840 (21.23) | .375 (9.53) | 4-40 |
| 11 | .984 (24.99) | 1.05 (26.67) | .264 (6.71) | .274 (6.96) | .960 (24.28) | .375 (9.53) | 4-40 |
| 13 | 1.157 (29.39) | 1.20 (30.48) | .344 (8.74) | .354 (8.99) | 1.100 (27.94) | .406 (10.31) | 6-32 |
| 15 | 1.280 (32.51) | 1.30 (33.02) | .460 (11.68) | .470 (11.94) | 1.100 (27.94) | .406 (10.31) | 6-32 |
| 17 | 1.406 (35.71) | 1.42 (36.07) | .545 (13.84) | .555 (14.10) | 1.230 (31.24) | .406 (10.31) | 6-32 |
| 19 | 1.516 (38.51) | 1.52 (38.61) | .615 (15.62) | .625 (15.88) | 1.410 (35.81) | .406 (10.31) | 6-32 |
| 21 | 1.642 (41.51) | 1.64 (41.66) | .698 (17.73) | .708 (17.98) | 1.510 (38.35) | .406 (10.31) | 6-32 |
| 23 | 1.768 (44.91) | 1.77 (44.96) | .780 (19.81) | .790 (20.07) | 1.660 (42.16) | .406 (10.31) | 6-32 |
| 25 | 1.890 (48.01) | 1.89 (48.01) | .850 (21.59) | .860 (21.84) | 1.760 (44.70) | .406 (10.31) | 6-32 |

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY.
3. MILLIMETERS ARE IN PARENTHESES.
4. DIMENSIONS APPLY AFTER PLATING.
5. CABLE ENTRY IS MEASURED WITH SADDLE BARS CLOSED AND BOTTOMED ON CLAMP EARS.
6. SCREW ASSEMBLY IAW: NAS720C4-6 OR NAS720C6-6 OR EQUIVALENT.
7. PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING. OPTION 'N' IS A FREE SPINNING SELF-LOCKING COUPLING.

FIGURE 1 - CONFIGURATION AND DIMENSIONS (CONTINUED)

REQUIREMENTS:

DESIGN AND CONSTRUCTION:

DIMENSIONS AND CONFIGURATION: SEE FIGURE 1.

INTERFACE DIMENSIONS: IN ACCORDANCE WITH AS85049, FIGURE 3.

ACCESSORY: CONSIST OF A COUPLING NUT, CLAMP STRAIN RELIEF, AND SADDLE BARS. THE COUPLING NUT SHALL BE CAPTIVATED TO THE CLAMP AND IS FREE TO ROTATE. ACCESSORIES WILL NOT ACCOMMODATE CONNECTORS USING SIZE 8, 4, OR 0 CONTACTS.

CLAMP SHALL HAVE NO PROTRUSIONS OR SHARP EDGES WHICH MAY PINCH CABE.